
Data sheet

valid from: 7/20/26



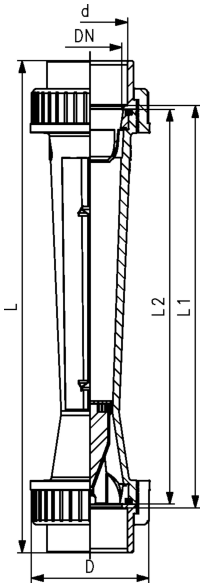

Variable area flow meter type 335
Float in PVDF without magnet
With solvent cement sockets PVC-U metric
O-rings in EPDM

Model:

- Standard guiding rod PVDF with stainless steel core (V4A) for DN50 and DN65

Option:

- 4-20 mA sensor
- Limit contacts
- Special scales for different media
- Union nuts and connecting parts in other materials on request

Scale range (l/h)	d (mm)	DN (mm)	Size (inch)	PVC-U transp. Code	Weight (kg)	Polyamid Code	Weight (kg)
50 - 500	32	25	1	**199 335 000**	0.564	**199 335 020**	0.522
100 - 1000	32	25	1	**199 335 001**	0.473	**199 335 021**	0.423
150 - 1500	40	32	1 ¼	**199 335 002**	0.626	**199 335 022**	0.567
250 - 2500	40	32	1 ¼	**199 335 003**	0.706	**199 335 023**	0.620
200 - 2000	50	40	1 ½	**199 335 004**	0.972	**199 335 024**	0.885
300 - 3000	50	40	1 ½	**199 335 005**	0.952	**199 335 025**	0.874
600 - 6000	50	40	1 ½	**199 335 006**	1.019	**199 335 026**	0.840
600 - 6000	63	50	2	**199 335 007**	1.357	**199 335 027**	1.381
1000 - 10000	63	50	2	**199 335 008**	1.299	**199 335 028**	1.196
1500 - 15000	63	50	2	**199 335 009**	1.301	**199 335 029**	1.355
2000 - 20000	75	65	2 ½	**199 335 010**	2.513	**199 335 030**	2.536
3000 - 30000	75	65	2 ½	**199 335 011**	2.442	**199 335 031**	2.286
8000 - 60000	75	65	2 ½	**199 335 012**	2.293	**199 335 032**	2.333

Scale range (l/h)	Polysulfone Code	Weight (kg)	D (mm)	L (mm)	L1 (mm)	L2 (mm)
50 - 500	**199 335 040**	0.464	58	385	341	335
100 - 1000	**199 335 041**	0.528	58	385	341	335
150 - 1500	**199 335 042**	0.698	72	393	341	335
250 - 2500	**199 335 043**	0.561	72	393	341	335
200 - 2000	**199 335 044**	1.057	83	403	341	335
300 - 3000	**199 335 045**	1.038	83	403	341	335
600 - 6000	**199 335 046**	0.991	83	403	341	335
600 - 6000	**199 335 047**	1.307	101	417	341	335
1000 - 10000	**199 335 048**	1.252	101	417	341	335
1500 - 15000	**199 335 049**	1.302	101	417	341	335
2000 - 20000	**199 335 050**	2.639	135	429	341	335
3000 - 30000	**199 335 051**	2.572	135	429	341	335
8000 - 60000	**199 335 052**	2.432	135	429	341	335

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: http://www.gfps.com